



PRODUCT INFORMATION

The Q566 Internet Radio Transcoder is the perfect solution to include streamed webradio stations into your OTT and cable networks.

You can include virtually any radio station in the world into your (local) cable network.


It converts up to 16 internet radio stations (Icecast/Shoutcast) into a DVB compliant MPEG-2 transport stream.

The signals are available via IP (ethernet) or DVB-ASI.

Our goal at Qbit is to maintain highest standards in build and signal quality.

Low power consumption and the compact design in industry standard dimensions (19", 1 U) without any fans allow easy integration of the device into your infrastructure.

Our embedded technology avoids time consuming updates and

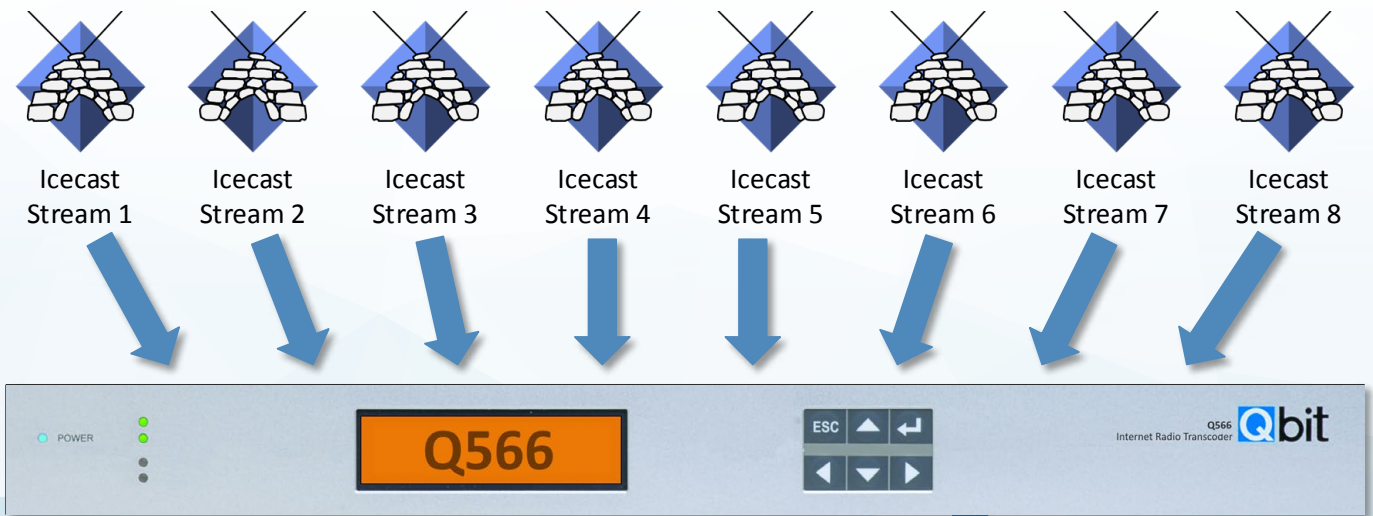


WEBRADIO 2 CABLE

EMBEDDED SYSTEM - NO COMPUTER

INTERNET RADIO INPUT

DVB TRANSPORT STREAM OUTPUT

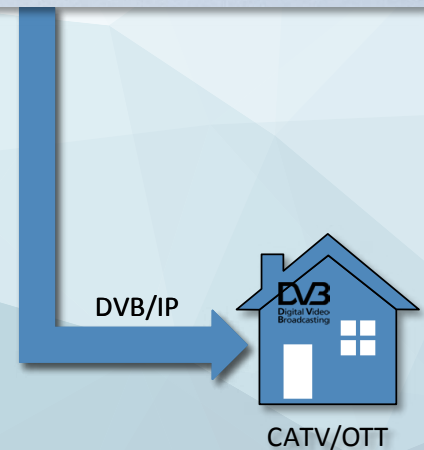

Q566 INTERNET RADIO TRANSCODER

FEATURES

- no annual upgrades or maintenance required - „set and forget“
- transcoding of multiple internet radio stations into DVB compliant transport streams
- receives Icecast/Shoutcast streams (MP3 / AAC)
- high security - WAN port (for Icecast) is physically separated from streaming unit and management - no break-in from internet possible
- several compression algorithms
 - MPEG 1 Layer II
 - AAC
- compression algorithm can be set individually per radio station
- all bit rates are supported according to the respective standards
- 32kHz, 48kHz sampling rate
- Meta data Tags are converted into EPG information and UECP data
 - artist
 - title
- 2 years warranty

APPLICATIONS

- feeding internet radios into digital networks
- Cable Networks
- OTT Networks
- Hospitals
- Hotels
- Cruise Ships

MANAGEMENT AND CONTROL

The Q566 Internet Radio Transcoder can be managed conveniently via the integrated web interface with all common web browsers.

The device can be monitored and managed via SNMP. Configurable alarms automatically inform your systems about errors and events.

The basic setup and status monitoring can be performed at the front panel.

SPECIFICATIONS

Web Radio Receiver (Input)

- 1 to 16 internet radio stations
- input format: MP3, AAC (32kHz / 44.1kHz / 48kHz)
- Icecast/Shoutcast

Transcoder (Output):

Compression Algorithms:

- MPEG-1/2 Layer II (ISO/IEC 1172-3, 13818-3)
- MPEG-2 AAC (ISO/IEC 13818-7)
- MPEG-4 AAC LC, AAC LD, HE-AAC, HE-AAC V2 (ISO/IEC 14496-3)

Bit Rate:

- all bit rates are supported according to the standards of the respective algorithms

Sampling Rate:

- 32kHz, 44.1 kHz, 48 kHz

Metadata:

- Metadata (Icecast / ID3 / AAC tag) are converted into UECP and EPG data
 - artist
 - title
 - now playing

Transport Protocols:

- via IP:
 - Output of DVB MPEG-2 transport streams including service information according to ETSI EN 300 468, compliant to „Pro-MPEG Code of Practice #3 release 2“ (FEC optional, see below)
- Transport via RTP (over UDP), pure UDP is possible
- FEC (Pro-MPEG compliant)

- via ASI:
 - Output of DVB MPEG-2 transport streams including service information according to ETSI EN 300 468

Network Interfaces:

- 3 separate Ethernet interfaces (IEEE 802.3, RJ45, 10/100MBit/s)
 - streaming input (physically separated from rest of the unit)
 - data output (Transport Stream via IP)
 - control (Web interface, SNMP and Ancillary Data)

- DVB-ASI output (EN 50083-9)
- additional DATA interface (for redundant streaming)

System Configuration, Control and Monitoring:

- via Ethernet with web browser
- via Ethernet with SNMP
- via front panel keys

Monitoring:

- internet radio status and meta data
- encoder status
- system status (voltages, temperature)
- all monitoring data can be accessed via web interface or SNMP

Power Supply:

- integrated switching power supply, input voltage: 100 to 240 V +-10%, 50 to 60 Hz
- -48V DC power supply
- power consumption: <30W

- redundant power supply
 - The optionally available redundant power supply protects the operation of the device and comes with the following functions:
 - measurement of the power supply voltages, values are provided via web GUI or SNMP
 - SNMP trap generation on power supply fail
 - activation of switching contacts on power supply fail
 - automatic switch-over in case of power supply fail

Housing:

- dimensions: 19" rack mount cabinet, 1U (483mm x 360mm x 44mm (w/d/h))
- weight: 4,5 kg

Environment:

- operation temperature: 0°C to 45°C
- storage temperature: -20°C to 70°C
- humidity: 20% to 90%, non-condensing

Key: ● Default ○ Options

WEBRADIO 2 CABLE

EMBEDDED SYSTEM - NO COMPUTER

INTERNET RADIO INPUT

DVB TRANSPORT STREAM OUTPUT

Q566 INTERNET RADIO TRANSCODER

ORDERING OPTIONS

Q566 INTERNET TRANSCODER

Q566 2 Ch	Transcoder for 2 Internet Radio Stations
Q566 4 Ch	Transcoder for 4 Internet Radio Stations
...	
Q566 16 Ch	Transcoder for 16 Internet Radio Stations

SIMILAR PRODUCTS

Q561 IP Audio Encoder
Q561-DVB IP Audio Encoder
Q567 DAB+ DVB Transcoder

SUPPORT OPTIONS

We are convinced of the high quality of our products. Hence, we are granting 2 years warranty without making compromises.

For the time after that, we offer affordable subsequent contracts. For optimal support and for software updates and upgrades we offer budget-friendly support contracts.

- 2 years hardware warranty
- hardware warranty extension up to 10 years
- Service Contract Basic (Updates, Email support)
- Service Contract Advanced (Updates, Email- and phone support, replacement devices etc.)

Errors and omissions excepted - version 28. 3. 2018 © Qbit GmbH



Stegwiesenstraße 34
76646 Bruchsal

phone: +49 (7251) 931 93-0
fax: +49 (7251) 931 93-93

Email: info@qbit.de
Internet: www.qbit.de